

FAQ: HOW CAN I DISABLE AND ENABLE PUSH BUTTONS AND SENSOR CHANNELS AT CERTAIN TIMES?

For a general explanation about Velbus, please consult the installation guide on www.velbus.eu.

Always use the latest version de Velbuslink, freely downloadable on www.velbus.eu > Support > Downloads.

1 QUESTION

A light needs to be switched by a PIR sensor from 8:00 until 22:00, and by a push button from 22:00 until 8:00. How do I program this in Velbuslink?

2 ANSWER


Proceed as follows:

1. Create the usual actions to have the PIR sensor and the push button switch the light relay. (For a general explanation about actions, cfr. the Velbus Installation Guide: Part 2, Programming on www.velbus.eu).




(*) Set the on-time of the motion output channel in the configuration settings of the sensor module (“Time-out”), see also the FAQ and downloads of the sensor modules.

2. In the configuration settings of the push button module, create program steps that lock the push button at 8:00 and unlock it at 22:00. (For a general explanation about program steps, cfr. the Velbus Installation Guide: Part 2, Programming on www.velbus.eu.)

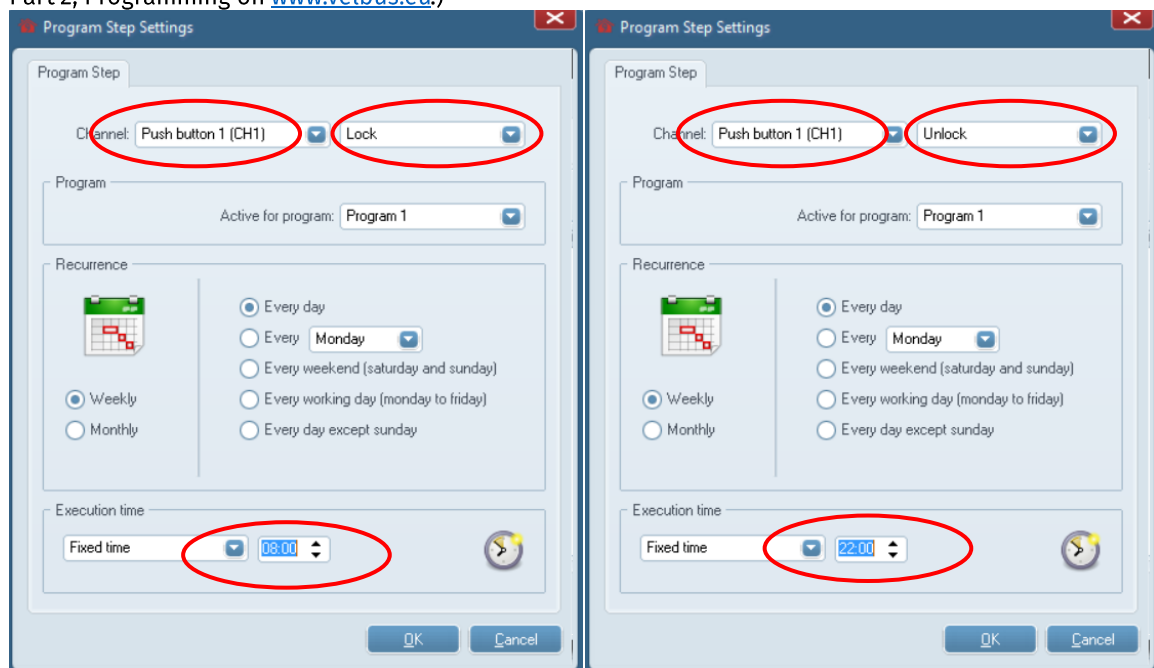

3. In the configuration settings of the sensor module, create program steps that lock the motion sensor at 22:00 and unlock it at 08:00.

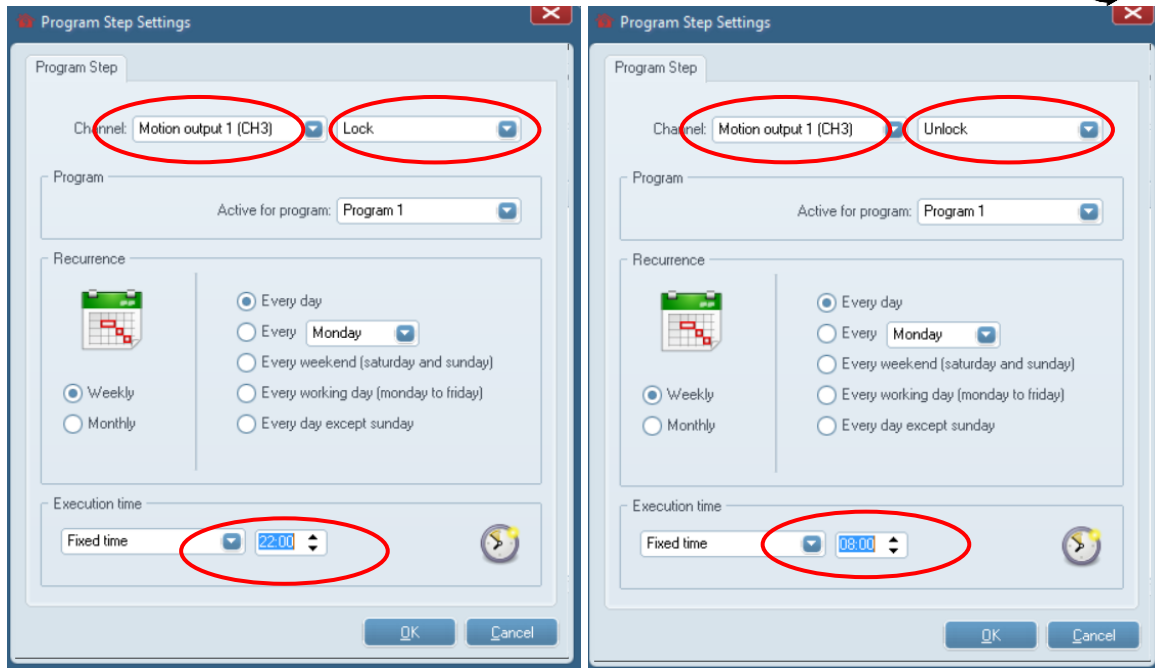

Do not forget to synchronise (write) the changes.